(19) World Intellectual Property Organization International Bureau



(43) International Publication Date 19 February 2004 (19.02.2004)

PCT

(10) International Publication Number WO 2004/014641 A1

(51) International Patent Classification7: B31C 3/00, 11/00

(21) International Application Number:

PCT/IT2003/000457

(22) International Filing Date: 25 July 2003 (25.07.2003)

(25) Filing Language:

English English

(26) Publication Language: FI2002A000154

(30) Priority Data: 9 August 2002 (09.08.2002) IT

(71) Applicant and

(72) Inventor: PERINI, Fablo [IT/IT]; Via S.Francesco, 1, I-55049 Viareggio (IT).

(74) Agent: MARTINI, Lazzaro; Studio Brevetti, Ing. Dr. Lazzaro Martini S.R.L., Via dei Rustici 5, I-50122 Firenze (II).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, IP, KE, KG, KP, KR, KZ, LC, LK. LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


UG. US. UZ. VC, VN, YU, ZA, ZM, ZW.

with international search report

with amended claims

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: MACHINE AND METHOD FOR PRODUCING CARDBOARD TUBES



(57) Abstract: Cardboard tubes producing machine, comprising means for feeding more paper or paper-like strips or ribbon-shaped material, a part of which is glued in correspondence of the lower surface thereof, for advancing and winding the said strips or ribbon-shaped material forming staggered and overlapping spirals onto a spindle (1), and cutting means for cutting the tube obtained by the advancement and winding of the strips or ribbon-shaped material on the spindle (1), thus obtaining tubular elements having a predetermined length. The machine comprises means (3), positioned upstream of the spindle (1) with respect to the advancing direction of the strips or ribbon-shaped material towards the spindle (1), distributing a predetermined amount of quick setting glue between the surfaces of the penultimate and the last strips or ribbon-shaped material wound on the spindle (1).

15



"Machine and a method for producing cardboard tubes." SPECIFICATION

The present invention relates to a machine and a method for producing cardboard tubes.

- 5 It is known that a machine for producing cardboard tubes basically comprises:
 - means for continuously feeding two or more ribbon-shaped strips made of paper or similar material, at least one strip being provided with a predetermined amount of glue in correspondence of one of its sides, the strips being drawn from corresponding bobbins which are supported by the feeding means;
 - belt type means, which are positioned downstream of said feeding means, for winding and advancing said strips onto a spindle, forming a plurality of spirals which are overlapped and staggered according to a predetermined staggering step, so that the tube results from the reciprocal overlapping and gluing of the strips which are spirally wound on the spindle;
 - 20 means, which are positioned downstream of said spindle, for cutting the continuous tube into elements having a predetermined length.
 - Obviously, the first strip, i.e. the strip destined to directly contact the spindle, is not glued, to avoid its adhesion to the spindle surface.
 - adhesion to the spinate surface.

 In practice, the belt means, which are positioned onto the spindle downstream of with respect to the feeding direction of the strips, drawn the strips by exerting on them a traction force which is directed towards the spindle and, while it is forming, the tube made by the

10

20

25



overlapped spiral strips advances and rotates about the longitudinal axis of the spindle.

The intervention rate of the cutting means depends on the advancing speed of the tube onto the spindle and on the predetermined length of the elements obtained from the tube.

Such a machine is described in WO 95/10400 and WO 95/10399.

One of the main drawbacks deriving from of such machines lies in a cleavage of the tube in correspondence of the cut sections. This drawback is even more evident when the operative speed of the machine increases.

The main aim of the present invention is to eliminate the said drawback.

This result has been achieved, according to the invention, by providing an apparatus having the features indicated in the characterizing part of the independent claims. Further characteristics being set forth in the dependent claims.

Thanks to the present invention, it is possible to

increase the operative speed of the machine, i.e. the feeding speed of the strips and, consequently, the tubes producing speed, without the aforesaid cleavage effect. Furthermore, a machine according to the present invention is relatively simple to make, cost-effective and reliable even after a prolonged service life and it may also be realized by modifying the existing machines, without adversely affecting the functionality thereof, at a cost which is very low when compared with the advantages which are obtained.

These and other advantages and characteristics of the invention will be best understood by anyone skilled in the art from a reading of the following description in

10

15

20

25



conjunction with the attached drawings given as a practical exemplification of the invention, but not to be considered in a limitative sense, wherein:

- Fig.1 is a simplified perspective view of the strips inlet section in a machine according to the present invention;
- Fig.2 is a plan view of the device shown in Fig.1;
- Fig.3 is a front view of the device shown in Fig.1;
- Fig.4 is a simplified block diagram of a possible control system for the distributor (3);
- Fig.5 is a schematic perspective view of a machine according to the present invention seen at a point upstream of the spindle.

Reduced to its basic structure, reference being made to the enclosed drawings, a machine according to the present invention comprises, similarly to the conventional machines:

- feeding means for feeding more paper or paper-like strips or ribbon-shaped material (N1, N2, N3), said strips unwinding from corresponding reels (not shown for sake of clarity) supported by the feeding means, said strips, except the first one (N1) which is destined to directly contact the spindle (1) of the machine, being glued in correspondence of their lower surface, i.e. the surface destined to look at the spindle (1);
 - a spindle (1) which is longitudinally developed along the direction of the tube to be produced, onto said spindle being wounded the strips (N1, N2, N3) forming a plurality of superimposed and staggered spirals;

15

20

25

30



- belt means (2) for spirally winding said strips (N1, N2, N3) onto the spindle (1) and advancing the tube along the spindle axis;
- cutting means (not shown for sake of clarity) for
 subdividing the tube into tubular elements having a predetermined length.

As stated above, the feeding and gluing means acting on the strips (N1, N2, N3), the winding means and the means for cutting the tube (which results from the overlapping and reciprocal gluing of the strips spirally wound onto the spindle) are known to those skilled in the art and, therefore, it is omitted a more detailed description thereof. The gluing of the lower surface of the strips or ribbon-shaped material (N1, N2, N3) is made, according to a known technique, immediately downstream of the reels from which the strips are drawn, i.e. before the strips enter the tube producing machine, by means of liquid glue contained in corresponding tanks onto which the strips advance, the liquid glue exploiting its adhesive power in a relatively long time to avoid that it became dry along the path between the gluing station (i.e. the station where the tanks containing the liquid glue are positioned) and the tube producing machine.

Advantageously, according to the present invention, the present machine comprises means (3) for applying a predetermined amount of quick setting glue to the upper surface (i.e. the surface opposite to that looking at the spindle 1) of at least one of the strips which are wound onto the spindle (1) and, more precisely, to the upper surface of at least one strip preceding the last one.

10

15

20

25

30



The wording "quick setting glue" denotes a glue having a high adhesive power acting in a short time.

For example, with reference to Fig.2 and Fig.3, the means (3) distribute the quick setting glue on the upper surface of the second of said strips (N1, N2, N3), i.e. on the upper surface of the strip (N2) preceding the last strip (N3).

Obviously, when two strips are to be employed instead of three, the means (3) distribute the glue on the upper surface of the first strip.

According to the example shown in the drawings, said means (3) comprise a distributor apt to distribute "hot melt" glue, whose body is solid to a fixed part (30) of the tube producing machine, in such a manner to result slightly upstream of the spindle (1), and whose nozzle (31) look at the upper surface of the strip to be glued (in the example, the upper surface of the strip N2).

Alternatively, according to the present invention, the said means (3) may act on the lower surface of the last strip instead of the upper surface of penultimate one, i.e. on the lower surface of the second strip if the tube is made up of two strips or on the lower surface of the third strip if the tube is made up of three strips. In that case, the means (3) are positioned on the other side of the strips with respect to the configuration of Figs. 1, 2 and 3.

In any case, according to present invention, provision is made for applying a predetermined amount of quick setting glue (for example, a "hot melt" glue) in correspondence of the interface between the penultimate strip and the last one.

20

25

30



Furthermore, advantageously, said means (3) may be activated when the advancing speed of the strips or ribbon-shaped material (N1, N2, N3) reaches a predetermined value, so that the means (3) are operative only when the advancing speed of the strips is higher than a predetermined value, avoiding dissipation of glue when the advancing speed of the strips, i.e. the tube producing speed, is so low that the above-mentioned tube cleavage does not arise.

10 At this end, provision is made for a strips (N1, N2, N3) advancing speed sensor, for example an encoder (4) connected with the motor (20) driving the belt (2) - which determines the advancing and winding of the strips on the spindle - and further connected with an electronic programmable unit (5) apt to receive the speed signals coming from the sensor (4) to activate the means (3) when the speed sensed by the sensor is higher than a programmed value.

The means (3) may distribute the glue continuously or intermittently.

As shown in Fig.5, said means (3) may also be positioned at a predetermined distance from the spindle (1) and they may be fixed to the structure of the means for feeding the strips or ribbon-shaped material (N1, N2, N3), said feeding means being positioned upstream of the spindle.

Practically, all the construction details may vary in any equivalent way as far as the shape, dimensions, elements disposition, nature of the used materials are concerned, without nevertheless departing from the scope of the adopted solution idea and, thereby, remaining within the limits of the protection granted to the present patent for industrial invention.



CLAIMS

- 1) Cardboard tubes producing machine, comprising means for feeding more paper or paper-like strips or ribbon-shaped material, a part of which is glued in correspondence of the lower surface thereof, for advancing and winding the 5 ribbon-shaped material or strips said overlapping and staggered spirals onto a spindle (1), and cutting means for cutting the tube obtained by the advancement and winding of the strips or ribbon-shaped material on the spindle (1), thus obtaining tubular 10 elements having a predetermined length, characterized in that it comprises means (3), positioned upstream of the spindle (1) with respect to the advancing direction of the strips or ribbon-shaped material towards the spindle (1), distributing a predetermined amount of quick 15 setting glue between the surfaces of the penultimate and the last strips or ribbon-shaped material wound on the spindle (1).
 - 2) Machine according to claim (1) characterized in that it comprises means (4) for sensing the advancing speed of said strips or ribbon-shaped material wound on the spindle (1), the said quick setting glue distributing means (3) being driven by the said sensing means (4).
 - 3) Machine according to one or more of the preceding claims
 25 characterized in that the said quick setting glue
 distributing means (3) comprise a "hot melt" glue
 distributor.
 - 4) Machine according to one or more of the preceding claims characterized in that said quick setting glue
 30 distributing means (3) comprise a nozzle (31) oriented towards the upper surface of the penultimate strip or ribbon-shaped material.

10

20



- 5) Machine according to one or more of the preceding claims characterized in that said quick setting glue distributing means (3) comprise a nozzle (31) oriented towards the lower surface of the last strip or ribbon-shaped material.
- 6) Method for producing cardboard tubes by winding a plurality of strips or ribbon-shaped material onto a spindle, a part of said strips or ribbon-shaped material being glued in correspondence of the lower surface thereof, forming corresponding overlapped and staggered spirals, characterized in that provision is made for applying a predetermined amount of quick setting glue between the surfaces of the penultimate and the last strips or ribbon-shaped materials wound on the spindle.
- 15 7) Method according to claim 6 characterized in that said quick setting glue is distributed only when the advancing and winding speed of said strips or ribbon-shaped material is higher than a predetermined value.
 - 8) Method according to claim 6 characterized in that the quick setting glue is a "hot melt" glue.
 - 9) Method according o claim 6 characterized in that the quick setting glue is distributed on the upper surface of the penultimate strip or ribbon-shaped material.
- 10) Method according o claim 6 characterized in that the quick setting glue is distributed on the lower surface of the last strip or ribbon-shaped material.



AMENDED CLAIMS


[Received by the International Bureau on 02 DEC 2003 (02.12.03); original claims 1 and 6, amended; original claims 2 to 5 and 7 to 10, unchanged]


- 1) Cardboard tubes producing machine, comprising means for feeding more paper or paper-like strips or ribbon-shaped material, a part of which is glued in correspondence of the lower surface thereof, for. advancing and winding the said strips or ribbonshaped material forming overlapping and staggered spirals onto a spindle (1), and cutting means for cutting the tube obtained by the advancement and winding of the strips or ribbon-shaped material on the spindle (1), thus obtaining tubular elements having a predetermined length, characterized in that it comprises means (3), positioned upstream of the spindle (1) with respect to the advancing direction of the strips or ribbon-shaped material towards the intermittently distributing spindle (1). prodetermined amount of quick setting glue between the surfaces of the penultimate and the last strips or ribbon-shaped material wound on the spindle (1).
 - 2) Machine according to claim (1) characterized in that it comprises means (4) for sensing the advancing speed of said strips or ribbon-shaped material wound on the spindle (1), the said quick setting glue distributing means (3) being driven by the said sensing means (4).
 - 3) Machine according to one or more of the preceding claims characterized in that the said quick setting glue distributing means (3) comprise a "hot melt" glue distributor.
 - 4) Machine according to one or more of the preceding claims characterized in that said quick setting glue distributing means (3) comprise a nozzle (31)




- oriented towards the upper surface of the penultimate: strip or ribbon-shaped material.
- 5) Machine according to one or more of the preceding claims characterized in that said quick setting gluedistributing means (3) comprise a nozzle (31) oriented towards the lower surface of the last strip or ribbon-shaped material.
- 6) Method for producing cardboard tubes by winding a plurality of strips or ribbon-shaped material onto a spindle, a part of said strips or ribbon-shaped material being glued in correspondence of the lower surface thereof, forming corresponding overlapped and staggered spirals, characterized in that provision is made for applying intermittantly a predatermined amount of quick setting glue between the surfaces of the ponultimate and the last strips or ribbon-shaped materials wound on the spindle.
 - 7) Method according to claim 6 characterized in that said quick setting glue is distributed only when the advancing and winding speed of said strips or ribbonshaped material is higher than a predetermined value.
 - 8) Method according to claim 6 characterized in that the quick setting glue is a "hot melt" glue.
 - 9) Method according o claim 6 characterized in that the quick setting glue is distributed on the upper surface of the penultimate strip or ribbon-shaped material.
 - 10) Method according to claim 6 characterized in that the quick setting glue is distributed on the lower surface of the last strip or ribbon-shaped material.




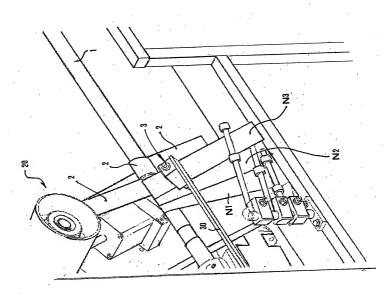

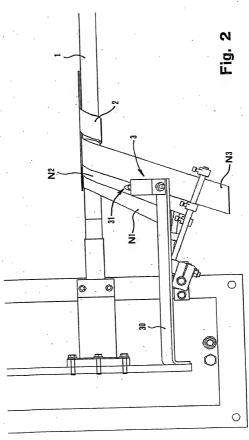

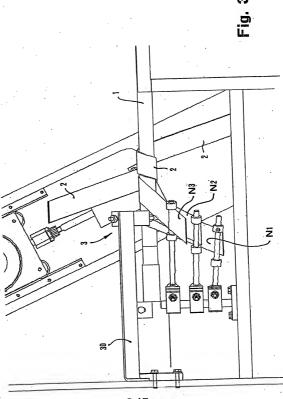



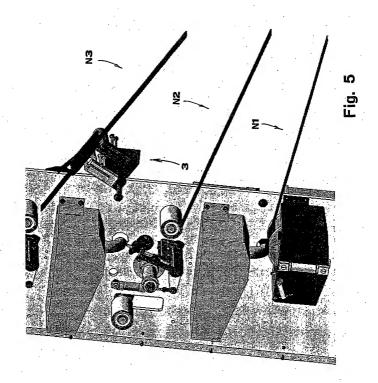

INTERNATIONAL SEARCH REPORT

A. CLASSIFICATION OF SUBJECT MATTER TPC 7 B31C3/00 B31C11/00

0 9 FEB 2005

According to International Patent Classification (IPC) or to both hallottal constitution and IPC

Minimum documentation searched (classification system followed by classification symbols) IPC 7 B31C

Documentation searched other than minimum documentation to the extent that such documents are included. In the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

WPI Data, PAJ, EPO-Internal

	DERED TO BE RELEVANT		and the state of the bloom
Category Citation of C	locument, with indication, where appropriate, of the relevan	Relevant to claim No.	
X US 3 3 Se abst colu	400 029 A (MESROBIAN ROBERT B ptember 1968 (1968-09-03)	ET AL)	1,3-6, 8-10
X US 4 1 Ar coli coli fig	1 196 037 A (BERG ROLF) pril 1980 (1980-04-01) umn 1, line 5 -column 2, line 3 umn 3, line 36 - line 40; claim ure 2	1,3,4,6, 8,9	
A US 6 J	4 338 147 A (BAECKSTROEM PER-OL uly 1982 (1982-07-06) /	E ET AL)	
X Further docum	ents are listed in the continuation of box C.	Patent family members are liste	
Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of perficusar relevence "C" earlier document but published on or after the international liting date. "L" document to the published on the principle or invention. "L" document to the published on the principle or invention. "L" document to the published on the published of a ribither data for the published on the published of a ribither data for the published on the publi			theory underlying the so claimed invention not be considered to document is taken alone a claimed trevention a claimed trevention the constance of the more other such docu- vious to a person skilled ent family
Date of the actual co	mpletion of the international search	Date of mailing of the International 12/11/2003 Authorized officer J-E. Söderberg	

INTERNATIONAL SEARCH REPORT

International Application No 03/00457

	<u> </u>	03/0045	.7
	itton) DOCUMENTS CONSIDERED TO BE RELEVANT		
(Continua Calegory °	tition) DOCUMENTS CONSIDERED TO THE REPORT OF THE RELEVANT passages Citation of document, with indication, where appropriate, of the relevant passages	Relevan	it to claim No.
4	WO 95 10399 A (PERINI FABIO SPA ;BIAGIOTTI GUGLIELMO (IT)) 20 April 1995 (1995-04-20) cited in the application		
A	WO 95 10400 A (PERINI FABIO SPA ;BIAGIOTTI GUGLIELMO (IT)) 20 April 1995 (1995-04-20) cited in the application		
A	US 3 942 418 A (SMITH CURTIS J) 9 March 1976 (1976-03-09)		
Α	EP 0 447 129 A (PHILIP MORRIS) 18 September 1991 (1991-09-18)		
		1	
		,	

ation on patent family members



Patent document cited in search report		Publication date		Patent family member(s)	Publication date
US 3400029	A	03-09-1968	BE DK FR GB NL	675431 A 118640 B 1458458 A 1106321 A 6600758 A	22-07-1966 14-09-1970 04-03-1966 13-03-1968 25-07-1966 28-04-1969
			SE	310451 B	28-04-1909
US 4196037	Α	01-04-1980	NONE		
US 4338147	Α	06-07-1982	FI FI BE	781977 A 782865 A 876409 A1	22-12-1979 21-03-1980 17-09-1979 27-07-1982
			CA CA DE DK	1128485 A1 1149794 A2 2908341 A1 186079 A ,B,	12-07-1983 03-01-1980 22-12-1979
		•	FR GB NL NO	2434104 A1 2025897 A ,B 7904701 A 790519 A	21-03-1980 30-01-1980 28-12-1979 27-12-1979
	A	20-04-1995	IT	1262533 B	02-07-1996
MO 3210333	Α	20 04 1330	AU WO	7861494 A 9510399 A1	04-05-1995 20-04-1995
WO ₂ 9510400	Α	20-04-1995	IT AT	1262532 B 155723 T 7861594 A	02-07-1996 15-08-1997 04-05-1995
			AU BR CA	9407777 A 2173479 A1	11-03-1997 20-04-1995
			CN DE	1133023 A ,B 69404473 D1	09-10-1996 04-09-1997 19-02-1998
			DE EP ES	69404473 T2 0722380 A1 2105767 T3	24-07-1996 16-10-1997 27-05-1996
			FI GR IL	961433 A 3024445 T3 111128 A	28-11-1997 16-07-2000
			WO JP	9510400 A1 9503449 T	20-04-1995 08-04-1997 15-06-1999
			KR PL RU	202228 B1 313813 A1 2116892 C1	22-07-1996 10-08-1998
			ÜS	5873806 A	23-02-1999
US 3942418	A	09-03-1976	NONE		
EP 0447129	Α	18-09-1991	US EP JP	5059164 A 0447129 A2 5000469 A	22-10-1991 18-09-1991 08-01-1993

This Page is Inserted by IFW Indexing and Scanning Operations and is not part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:				
Defects in the images include but are not image.				
□/BLACK BORDERS				
☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES				
FADED TEXT OR DRAWING				
☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING				
☐ SKEWED/SLANTED IMAGES				
☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS				
☐ GRAY SCALE DOCUMENTS				
☐ LINES OR MARKS ON ORIGINAL DOCUMENT				
\square reference(s) or exhibit(s) submitted are poor quality				
□ OTHER:				

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.